


Dimensiones de bujes cónico TB

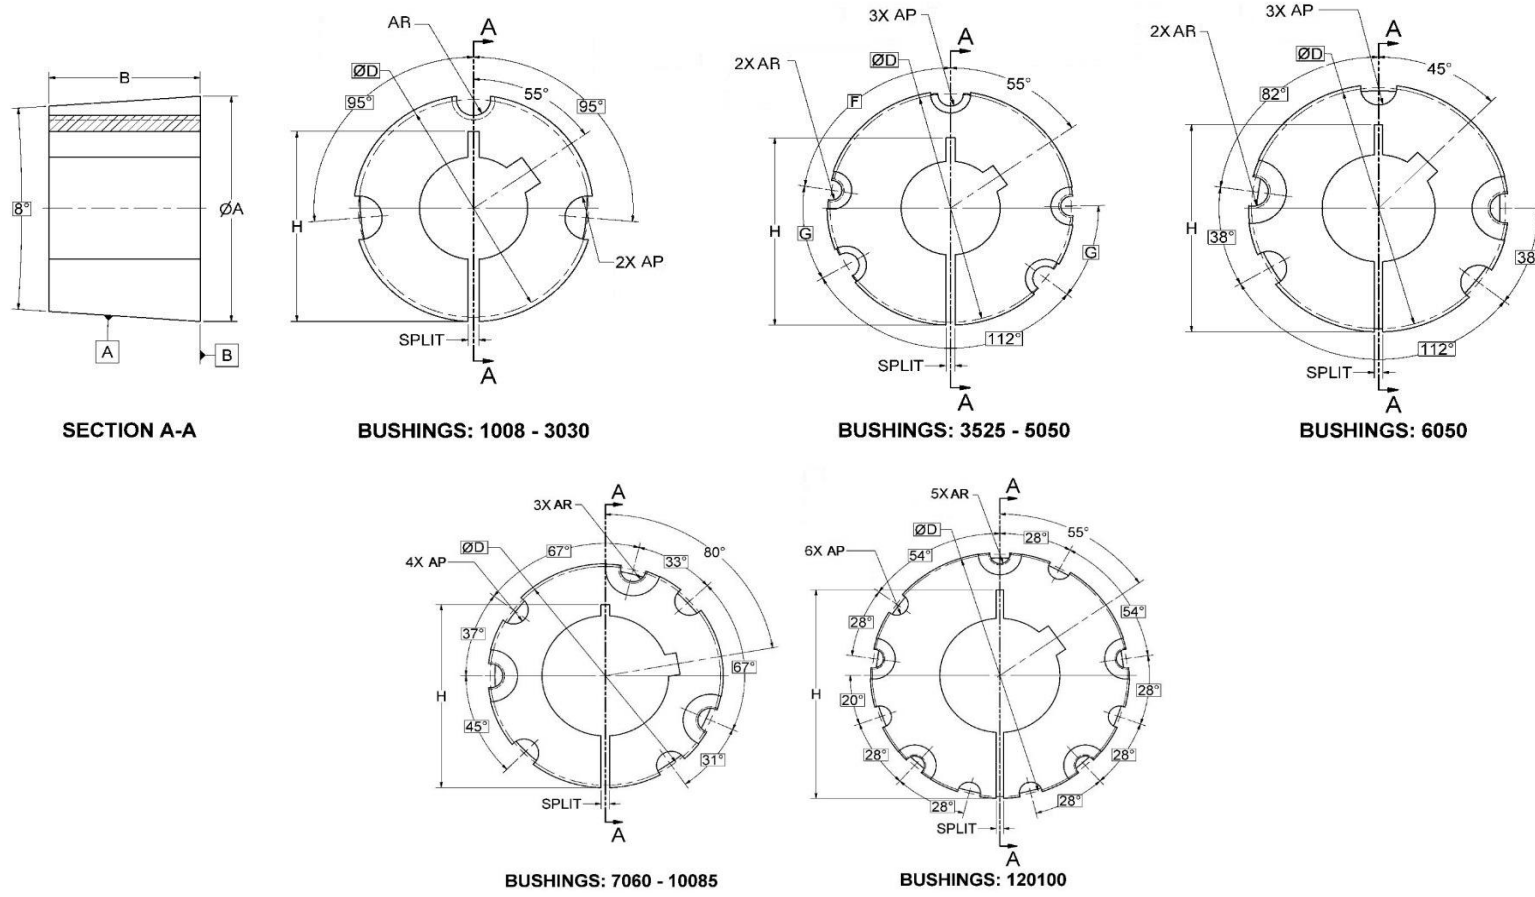

TAPER BUSHINGS																			
TB Nº	DIMENSIONES (mm)						CAPACIDAD DE TORQUE		TORNILLOS										
	A	B	C (HUB DIAM.)			ØD	AM (d)		lb.in	N.m	TIPO	TAMAÑO (F)	CANT.	PAR DE AJUSTE					
			M2	M3	K1		ØMIN	ØMAX						lb.in	N.m				
1008	35,0	22,1	60	56	49	33,7	10	25	1200	136	ALLEM SIN CABEZA	1/4" - 20 UNC x 1/2"	2	55	6				
1108	38,2	22,1	64	59	52	36,9	10	29	1300	147									
1210	47,5	25,4	92	83	73	44,5	13	32	3550	407		3/8" - 16 UNC x 5/8"	2	175	20				
1215	47,5	38,1	79	73	67	44,5	13	32											
1310	50,7	25,4	95	86	76	47,6	13	35	3850	435						7/16" - 14 UNC x 7/8"	2	280	32
1315	50,7	38,1	-	-	-	47,6	13	35											
1610	57,0	25,4	102	92	83	54,0	13	41	4300	486						1/2" - 13 UNC x 1"	2	430	49
1615	57,0	38,1	89	83	76	54,0	13	41											
2012	69,7	31,8	121	111	98	66,7	13	51	7150	808		5/8" - 11 UNC x 1 1/4"	2	800	90				
2017	69,7	44,5	-	-	-	66,7	13	51											
2517	85,6	44,5	140	124	124	82,6	13	64	11300	1310		ALLEM CON CABEZA	1/2" - 13 UNC x 1 1/2"	3	1000	113			
2525	85,6	63,5	121	114	108	82,6	13	64											
3020	107,8	50,8	178	159	143	101,6	24	76	24000	2710	5/8" - 11 UNC x 1 1/4"		2	800	90				
3030	107,8	76,2	159	146	137	101,6	24	76											
3525	126,8	63,5	197	178	165	122,6	30	102	44800	5060	1/2" - 13 UNC x 1 1/2"		3	1000	113				
3535	126,8	88,9	197	178	165	122,6	30	89											
4030	145,9	76,2	241	216	197	140,7	37	125	77300	8740	5/8" - 11 UNC x 1 3/4"		3	1700	192				
4040	145,9	101,6	241	216	197	140,7	37	102											
4535	161,7	88,9	267	241	222	155,7	49	127	110000	12400	3/4" - 10 UNC x 2"		3	2450	277				
4545	161,7	114,3	267	241	222	155,7	49	114											
5040	177,6	101,6	292	267	241	170,7	62	140	126000	14200	7/8" - 9 UNC x 2 1/2"		3	3100	350				
5050	177,6	127,0	292	267	241	170,7	59	127											
6050	234,7	127,0	432	394	343	228,6	97	152			HEXAGONALES	1 1/4" - 7 UNC x 3 1/2"	3	7820	883				
7060	260,1	152,4	470	432	376	254,0	116	178					4						
8065	285,5	165,1	483	445	394	279,4	129	203				4	13700	1548					
10065	374,4	215,9	597	559	495	368,3	167	254											
120100	438,0	254,0	711	660	584	431,8	192	305							6				